SET-4

Series: ONS/1 Code No. 91/1

Roll No.

Candidates must write the Code on the title page of the answer-book.

- Please check that this question paper contains 16 printed pages.
- Code number given on the right hand side of the question paper should be written on the title page of the answer-book by the candidate.
- Please check that this question paper contains 7 questions.
- Please write down the Serial Number of the question before attempting it.
- 15 minute time has been allotted to read this question paper. The question paper will be distributed at 10.15 a.m. From 10.15 a.m. to 10.30 a.m., the students will read the question paper only and will not write any answer on the answer-book during this period.

COMPUTER SCIENCE

Time allowed: 3 hours

Maximum marks: 70

General Instructions:

- (i) Programming Language in SECTION A: C++.
- (ii) Programming Language in SECTION B: Python.
- (iii) Answer either SECTION A or B, and SECTION C is compulsory.
- (iv) It is compulsory to mention on the page 1 in answer book whether you are attempting SECTION A or SECTION B.
- (v) All questions are compulsory within each section.

SECTION - A

(Only for Candidates, who opted for C++)

(a) Out of the following, find those identifiers, which cannot be used for naming Variable, Constants or Functions in a C++ program:

 _Cost, Price*Qty, float, Switch,
 Address One, Delete, Number12, do

91/1 1 [P.T.O.

Jayapriya has started learning C++ and has typed the following program. When she (b) compiled the following code written by her, she discovered that she needs to include some header files to successfully compile and execute it. Write the names of those header files, which are required to be included in the code. 1 void main() { float A, Number, Outcome; cin>>A>>Number; Outcome=pow(A, Number); cout << Outcome << endl; } (c) Rewrite the following C++ code after removing any/all syntactical errors with each correction underlined. 2 Note: Assume all required header files are already being included in the program. #define Equation (p, q) = p + 2 * qvoid main() { float A=3.2; B=4.1; C=Equation(A,B); cout << 'Output=' << C << endl Find and write the output of the following C++ program code: 2 Note: Assume all required header files are already included in the program. typedef char STRING[80]; void MIXITNOW(STRING S) { int Size=strlen(S); for (int I=0; I < Size-1; I+=2) { char WS=S[I]; S[I]=S[I+1];S[I+1]=WS;for (I=1; I<Size; I+=2)</pre> if(S[I] > = 'M' && S[I] < = 'U')S[I]='@'; } void main() { STRING Word="CRACKAJACK"; MIXITNOW (Word); cout<<Word<<endl;</pre> }

91/1

2

```
3
    Find and write the output of the following C++ program code:
(e)
    Note: Assume all required header files are already being included in the program.
    class Stock
     {
         long int ID;
         float Rate;
         int Date;
    public:
         Stock() {ID=1001; Rate=200; Date=1; }
         void RegCode(long int I,float R)
         {
              ID=I;
              Rate=R;
         }
         void Change(int New,int DT)
         {
              Rate+=New;
              Date=DT;
         }
         void Show()
         {
              cout << "Date : " << Date << endl;
              cout << ID << "#" << Rate << endl;
         }
    };
    void main()
     {
         Stock A, B, C;
         A. RegCode (1024, 150);
         B.RegCode (2015, 300);
         B.Change (100, 29);
         C.Change(-20, 20);
         A. Show();
         B. Show();
         C.Show();
    }
```

(f) Look at the following C++ code and find the possible output(s) from the options (i) to (iv) following it. Also, write the maximum and the minimum values that can be assigned to the variable CHANGER.

Note:

}

• Assume all the required header files are already being included in the code.

2

• The function random(n) generates an integer between 0 and n-1

```
void main()
{
    randomize();
    int CHANGER;
    CHANGER=random(3);
char CITY[][25]={"DELHI","MUMBAI","KOLKATA","CHENNAI"};
for(int I=0;I<=CHANGER;I++)
{
    for(int J=0;J<=I;J++)
        cout<<CITY[J];
    cout<<endl;
}</pre>
```

(i)	(ii)
DELHI	DELHI
DELHIMUMBAI	DELHIMUMBAI
DELHIMUMBAIKOLKATA	DELHIMUMBAIKOLKATA
	DELHIM UMBAIKOLKATACHENNAI
(iii)	(iv)
MUMBAI	KOLKATA
MUMBAIKOLKATA	KOLKATACHENNAI
MUMBAIKOLKATACHENNAI	

- 2. (a) Differentiate between Constructor and Destructor functions giving suitable example using a class in C++. When does each of them execute?
 - (b) Observe the following C++ code and answer the questions (i) and (ii). Assume all necessary files are included:

```
class FICTION
{
    long FCode;
    char FTitle[20];
    float FPrice;
Public:
```

91/1 4

```
FICTION()
                                      //Member Function 1
    {
        cout << "Bought" << endl;
        FCode=100; strcpy (FTitle, "Noname"); FPrice=50;
    FICTION(int C, char T[], float P) // Member Function 2
    {
        FCode=C;
        strcpy(FTitle, T);
        FPrice=P;
    }
                                      // Member Function 3
    void Increase(float P)
    {
        FPrice+=P;
    }
                                        Member Function 4
    void Show()
    {
        cout<<FCode<<":"<<FTitle<<":"<<FPrice<<endl;
    }
    ~FICTION()
                                      // Member Function 5
    {
        cout<<"Fiction removed!" <<endl</pre>
    }
};
                                                //Line 1
void main()
                                                //Line 2
    FICTION F1, F2 (101, "Dare", 75);
                                                //Line 3
    for (int I=0; I<4; I++)
                                                //Line 4
                                                //Line 5
    {
        F1. Increase (20); F2. Increase (15);
                                                //Line 6
        F1.Show(); F2.Show();
                                                //Line 7
                                                //Line 8
    }
}
                                                //Line 9
```

- (i) Which specific concept of object oriented programming out of the following is illustrated by Member Function 1 and Member Function 2 combined together?
 - Data Encapsulation
 - Data Hiding
 - Polymorphism
 - Inheritance
- (ii) How many times the message "Fiction removed!" will be displayed after executing the above C++ code? Out of Line 1 to Line 9, which line is responsible to display the message "Fiction removed!"?

91/1 5 [P.T.O.

```
(c)
    Write the definition of a class METROPOLIS in C++ with following description: 4
    Private Members
    - MCode
                  //Data member for Code (an integer)
                  //Data member for Name (a string)
    - MName
                  //Data member for Population (a long int)
    - MPop
    - Area
                  //Data member for Area Coverage (a float)
                  //Data member for Population Density ( a float)
    - PopDens
                  //A member function to calculate -----
    - CalDen()
                  //Density as PopDens/Area
    Public Members
    - Enter()
                  //A function to allow user to enter values of
                  //Mcode, MName, MPop, Area and call CalDen()
                  //function
                 //A function to display all the data members
    - ViewALL()
                  //also display a message "Highly Populated Area"
                  //if the Density is more than 12000
(d) Answer the questions (i) to (iv) based on the following:
                                                                  4
    class PRODUCT
    {
        int Code;
        char Item[20];
    protected:
        float Qty;
    public:
        PRODUCT();
        void GetIn(); void Show();
    };
    class WHOLESALER
        int WCode;
    protected:
        char Manager[20];
    public:
        WHOLESALER();
        void Enter();
        void Display();
    };
    class SHOWROOM : public PRODUCT, private WHOLESALER
        char Name[20],City[20];
    public:
        SHOWROOM();
        void Input();
        void View();
    };
                              6
```

91/1

- (i) Which type of Inheritance out of the following is illustrated in the above example?
 - Single Level Inheritance
 - Multi Level Inheritance
 - Multiple Inheritance
- (ii) Write the names of all the data members, which are directly accessible from the member functions of class SHOWROOM.
- (iii) Write the names of all the member functions, which are directly accessible by an object of class SHOWROOM.
- (iv) What will be the order of execution of the constructors, when an object of class SHOWROOM is declared?
- 3. (a) Write the definition of a function FixPay(float Pay[], int N) in C++, which should modify each element of the array Pay having N elements, as per the following rules:

Existing Value of Pay	Pay to be changed to
If less than 100000	Add 25% in the existing value
If >=100000 and <20000	Add20% in the existing value
If >=200000	Add 15% in the existing value

- (b) T[20][50] is a two dimensional array, which is stored in the memory along the row with each of its element occupying 4 bytes, find the address of the element T[15][5], if the element T[10][8] is stored at the memory location 52000.
- (c) Write the definition of a member function INSERT() for a class QUEUE in C++, to insert an ITEM in a dynamically allocated Queue of items considering the following code is already written as a part of the program.

```
struct ITEM
{
    int INO; char INAME[20];
    ITEM *Link;
};
class QUEUE
{
    ITEM *R,*F;
public :
    QUEUE() {R=NULL;F=NULL;}
    void INSERT();
    void DELETE();
    ~QUEUE();
};
```

91/1 7 [P.T.O.

(d) Write definition for a function SHOWMID(int P[][5], int R, int C) in C++ to display the elements of middle row and middle column from a two dimensional array P having R number of rows and C number of columns.

3

For example, if the content of array is as follows:

115	112	116	101	125
103	101	121	102	101
185	109	109	160	172

The function should display the following as output:

```
103 101 121 102 101
116 121 109
```

- (e) Convert the following Infix expression to its equivalent Postfix expression, showing the stack contents for each step of conversion.
 2
 A/(B+C)*D-E
- 4. (a) Write function definition for WORD4CHAR() in C++ to read the content of a text file FUN.TXT, and display all those words, which has four characters in it. 2 Example:

If the content of the file fun.TXT is as follows:

```
When I was a small child, I used to play in the garden with my grand mom. Those days were amazingly funful and I remember all the moments of that time
```

The function WORD4CHAR() should display the following:

```
When used play with days were that time
```

(b) Write a definition for function BUMPER() in C++ to read each object of a binary file GIFTS.DAT, find and display details of those gifts, which has remarks as "ÖN DISCOUNT". Assume that the file GIFTS.DAT is created with the help of objects of class GIFTS, which is defined below:

```
of class GIFTS, which is defined below:
    class GIFTS
{
        int ID; char Gift[20], Remarks[20]; float Price;
public:
        void Takeonstock()
        {
            cin>>ID; gets (Gift); gets (Remarks); cin>>Price;
        }
        void See()
        {
            cout<<ID<<":"<<Gift<<":"<<Price<<"":"<<Remarks<<endl;
        }
        char *GetRemarks() {return Remarks;}
};</pre>
```

91/1 8

Find the output of the following C++ code considering that the binary file MEM.DAT exists on the hard disk with a data of 1000 members: class MEMBER { int Mcode; char MName[20]; public: void Register(); void Display(); }; void main() { fstream MFile; MFile.open("MEM.DAT", ios::binary|ios::in); MEMBER M; MFile.read((char*)&M, sizeof(M)); cout << "Rec: " << MFile.tellq() / sizeof(M) << endl;</pre> MFile.read((char*)&M, sizeof(M)); MFile.read((char*)&M, sizeof(M)); cout<<"Rec:""<<MFile.tellg()/sizeof(M)<<endl;</pre> MFile.close(); } SECTION - B (Only for Candidates, who opted for Python) (a) Out of the following, find those identifiers, which cannot be used for naming Variable or Functions in a Python program: Price*Qty, class, For, do, 4thCol, totally, Row31, _Amount Name the Python Library modules which need to be imported to invoke the (b) following functions: 1 load() (i) (ii) pow () Rewrite the following code in python after removing all syntax error(s). Underline (c) each correction done in the code. 2 for Name in [Amar, Shveta, Paraq] IF Name [0] = 'S': print (Name) 2 (d) Find and write the output of the following python code: Numbers = [9, 18, 27, 36]for Num in Numbers: for N in range(1, Num%8): print (N, "#", end="") print()

1.

91/1

9

[P.T.O.

3 (e) Find and write the output of the following python code: class Notes: def __init__(self, N=100, Nt="CBSE"): #constructor self.Nno=N self.NName=Nt def Allocate(self, N, Nt): self.Nno= self.Nno + N self.NName= Nt + self.Nname def Show(self): print(self.Nno,"#", self.NName) s=Notes() t=Notes(200)u=Notes(300, "Made Easy") s.Show() t.Show() u.Show() s.Allocate(4, "Made") t.Allocate(10, "Easy") u.Allocate(25, "Made Easy") s.Show() t.Show() u.Show() What are the possible outcome(s) executed from the following code? Also specify (f) the maximum and minimum values that can be assigned to variable PICKER. import random

import random
PICK=random.randint(0,3)
CITY=["DELHI","MUMBAI","CHENNAI","KOLKATA"];
for I in CITY:
 for J in range(1,PICK):
 print(I,end="")

(i)	(ii)
DELHIDELHI	DELHI
MUMBAIMUMBAI	DELHIMUMBAI
CHENNAICHENNAI	DELHIMUMBAICHENNAI
KOLKATAKOLKATA	
(iii)	(iv)
DELHI	DELHI
MUMBAI	MUMBAIMUMBAI
CHENNAI	KOLKATAKOLKATA
KOLKATA	

91/1 10

print()

```
2.
    (a)
         What is the difference between Multiple and Multilevel inheritance? Give suitable
         examples to illustrate both.
         What will be the output of the following python code considering the following set
    (b)
         of inputs?
                                                                           2
         JAYA
         My 3 books
         PICK2
         2120
         Also, explain the try and except used in the code.
         Counter=0
         while True:
             try:
                  Number=int(raw_input("Give a Number"))
                  break
             except ValueError:
                  Counter=Counter+2
                  print("Re-enter Number")
         print (Counter)
         # For later versions of python, raw_input
         # should be considered as input
         Write a class CITY in Python with following specifications:
                                                                           4
    (c)
         Instance Attributes
                     # Numeric value
         - Code
                     # String value
         - Name
                      # Numeric value for Population
         - Pop
                     # Numeric value

    KM

         - Density # Numeric value for Population Density
         Methods:
         - CalDen()
                       # Method to calculate Density as Pop/KM
         - Record()
                       # Method to allow user to enter values
                         Code, Name, Pop, KM and call CalDen() method
                       # Method to display all the data members
         - See()
                          also display a message "Highly Populated
                          Area" if the Density is more than 12000.
         How do we implement abstract method in python? Give an example for the same. 2
    (d)
         What is the significance of super() method? Give an example for the same.
                                                                           2
    (e)
91/1
                                     11
```

[P.T.O.

3. (a) What will be the status of the following list after the First, Second and Third pass of the insertion sort method used for arranging the following elements in descending order?

Note: Show the status of all the elements after each pass very clearly underlining the changes.

- (b) For a given list of values in descending order, write a method in python to search for a value with the help of Binary Search method. The method should return position of the value and should return -1 if the value not present in the list.
- (c) Write Insert(Place) and Delete(Place) methods in python to add Place and Remove Place considering them to act as Insert and Delete operations of the data structure Queue.
- (d) Write a method in python to find and display the prime numbers between 2 to N. Pass N as argument to the method.
- (e) Evaluate the following postfix notation of expression. Show status of stack after every operation.

1

- 4. (a) Write a statement in Python to perform the following operations:
 - To open a text file "BOOK.TXT" in read mode
 - To open a text file "BOOK.TXT" in write mode
 - (b) Write a method in python to write multiple line of text contents into a text file mylife.txt line.
 - (c) Consider the following definition of class Staff, write a method in python to search and display the content in a pickled file staff.dat, where Staffcode is matching with 3 'S0105'.

```
class Staff:
```

```
def_init_(self,S,SNM):
    self.Staffcode=S
    self.Name=SNM

def Show(self):
    print(self.Staffcode," - ",self.Name)
```

91/1

SECTION - C

(For all the Candidates)

5. (a) Observe the following STUDENTS and EVENTS tables carefully and write the name of the RDBMS operation which will be used to produce the output as shown in LIST. Also, find the Degree and Cardinality of the LIST.

STUDENTS

EVENTS

NO	NAME
1	Tara Mani
2	Jaya Sarkar
3	Tarini Trikha

EVENTCODE	EVENTNAME
1001	Programming
1002	IT Quiz

LIST

NO	NAME	EVENTCODE	EVENTNAME
1	Tara Mani	1001	Programming
1	Tara Mani	1002	IT Quiz
2	Jaya Sarkar	1001	Programming
2	Jaya Sarkar	1002	IT Quiz
3	Tarini Trikha	1001	Programming
3	Tarini Trikha	1002	IT Quiz

(b) Write SQL queries for (i) to (iv) and find outputs for SQL queries (v) to (viii), which are based on the tables.

Table: VEHICLE

CODE	VTYPE	PERKM
101	VOLVO BUS	160
102	AC DELUXE BUS	150
103	ORDINARY BUS	90
105	SUV	40
104	CAR	20

Note:

- PERKM is Freight Charges per kilometer
- VTYPE is Vehicle Type

Table: TRAVEL


NO	NAME	TDATE	KM	CODE	NOP
101	Janish Kin	2015-11-13	200	101	32
103	Vedika Sahai	2016-04-21	100	103	45
105	Tarun Ram	2016-03-23	350	102	42
102	John Fen	2016-02-13	90	102	40
107	Ahmed Khan	2015-01-10	75	104	2
104	Raveena	2016-05-28	80	105	4
106	Kripal Anya	2016-02-06	200	101	25

Note:

- NO is Traveller Number
- KM is Kilometer travelled
- NOP is number of travellers travelled in vehicle
- TDATE is Travel Date

- (i) To display NO, NAME, TDATE from the table TRAVEL in descending order of NO.
- (ii) To display the NAME of all the travellers from the table TRAVEL who are travelling by vehicle with code 101 or 102.
- (iii) To display the NO and NAME of those travellers from the table TRAVEL who travelled between '2015-12-31' and '2015-04-01'.
- (iv) To display all the details from table TRAVEL for the travellers, who have travelled distance more than 100 KM in ascending order of NOP.
- (v) SELECT COUNT (*), CODE FROM TRAVEL
 GROUP BY CODE HAVING COUNT(*)>1;
- (vi) SELECT DISTINCT CODE FROM TRAVEL;
- (vii) SELECT A.CODE, NAME, VTYPE
 FROM TRAVEL A, VEHICLE B
 WHERE A.CODE=B.CODE AND KM<90;</pre>
- (viii) SELECT NAME, KM*PERKM
 FROM TRAVEL A, VEHICLE B
 WHERE A.CODE=B.CODE AND A.CODE='105';
- 6. (a) Verify the following using Boolean Laws:

 A' + B' .C=A' .B' .C' + A' .B.C' + A' .B.C + A' .B' .C+ A.B' .C
 - (b) Write the Boolean Expression for the result of the Logic Circuit as shown below: 2

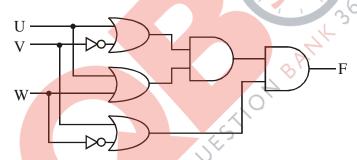

(c) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table :

P	Q	R	F(P, Q, R)
0	0	0	0
0	0	1	1
0	1	0	1
0	1	1	0
1	0	0	0
1	0	1	0
1	1	0	1
1	1	1	1

(d) Reduce the following Boolean Expression to its simplest form using K-Map: $F(X,Y,Z,W) = \Sigma(2,6,7,8,9,10,11,13,14,15)$


91/1 14

7. Give two examples of PAN and LAN type of networks. (a)

1

- Which protocol helps us to browse through web pages using internet browsers? (b) 1 Name any one internet browser.
- (c) Write two advantages of 4G over 3G Mobile Telecommunication Technologies in terms of speed and services. 1
- Write two characteristics of Web 2.0. (d) 1
- What is the basic difference between Trojan Horse and Computer Worm? 1 (e)
- (f) Categorise the following under Client Side and Server Side script category: 1
 - (i) **VB** Script
 - (ii) **ASP**
 - (iii) JSP
 - (iv) JavaScript
- Uplifting Skills Hub India is a knowledge and skill community which has an aim to (g) uplift the standard of knowledge and skills in the society. It is planning to setup its training centers in multiple towns and villages pan India with its head offices in the nearest cities. They have created a model of their network with a city, a town and 3 villages as follows.

As a network consultant, you have to suggest the best network related solutions for their issues/problems raised in (i) to (iv) keeping in mind the distances between various locations and other given parameters.

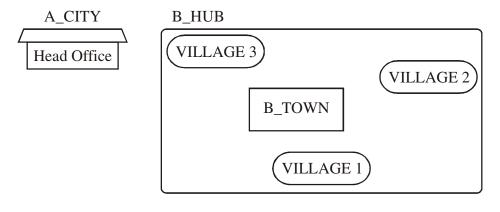

91/1 15 [P.T.O.

Shortest distances between various locations:

VILLAGE 1 to B_TOWN	2 KM
VILLAGE 2 to B_TOWN	1.0 KM
VILLAGE 3 to B_TOWN	1.5 KM
VILLAGE 1 to VILLAGE 2	3.5 KM
VILLAGE 1 to VILLAGE 3	4.5 KM
VILLAGE 2 to VILLAGE 3	2.5 KM
A_CITY Head Office to B_HUB	25 KM

Number of Computers installed at various locations are as follows:

B_TOWN	120
VILLAGE 1	15
VILLAGE 2	10
VLLAGE 3	15
A_CITY OFFICE	6

Note:

- In Villages, there are community centers, in which one room has been given as training center to this organization to install computers.
- The organization has got financial support from the government and top IT companies.
- (i) Suggest the most appropriate location of the SERVER in the B_HUB (out of the 4 locations), to get the best and effective connectivity. Justify your answer.
- (ii) Suggest the best wired medium and draw the cable layout (location to location) to efficiently connect various locations within the B_HUB. 1
- (iii) Which hardware device will you suggest to connect all the computers within each location of B_HUB?
- (iv) Which service/protocol will be most helpful to conduct live interactions of Experts from Head Office and people at all locations of B_HUB?

91/1 16

CBSE AISSCE 2008320016Quanting Schemofth Computer Science

(Sub Code: 083 Paper Code 91/1 Delhi)

General Instructions:

- The answers given in the marking scheme are SUGGESTIVE, Examiners are requested to award marks for all alternative correct Solutions/Answers conveying the similar meaning
- All programming questions have to be answered with respect to C++ Language / Python only
- In C++ / Python, ignore case sensitivity for identifiers (Variable / Functions / Structures / Class Names)
- In Python indentation is mandatory, however, number of spaces used for indenting may vary
- In SQL related questions both ways of text/character entries should be acceptable for Example: "AMAR" and 'amar' both are acceptable.
- In SQL related questions all date entries should be acceptable for Example: 'YYYY-MM-DD', 'YY-MM-DD', 'DD-Mon-YY', "DD/MM/YY", 'DD/MM/YY', "MM/DD/YY", 'MM/DD/YY' and {MM/DD/YY} are correct.
- In SQL related questions semicolon should be ignored for terminating the SQL statements
- In SQL related questions, ignore case sensitivity.

SECTION A - (Only for candidates, who opted for C++)				
1	(a)	Out of the following, find those identifiers, which cannot be used for naming Variable, Constants or Functions in a C++ program: _Cost, Price*Qty, float, Switch, Address One, Delete, Number12, do	2	
	Ans	Price*Qty float Address One do (½ Mark for each correct name) Note: Deduct ½ Mark for each wrong name written		
	(b)	Jayapriya has started learning C++ and has typed the following program. When she compiled the following code written by her, she discovered that she needs to include some header files to successfully compile and execute it. Write the names of those header files, which are required to be included in the code.	1	

```
void main()
       float A, Number, Outcome;
       cin>>A>>Number;
       Outcome=pow(A, Number);
       cout<<Outcome<<endl;</pre>
      }
Ans
         iostream.h OR iomanip.h
            math.h
      (1/2 Mark for writing each correct header file)
      Note:
         Ignore any other header files, if mentioned.
          complex.h is acceptable in place of math.h
      Rewrite the following C++ code after removing any/all syntactical errors with
(c)
      each correction underlined.
      Note: Assume all required header files are already being included in the program.
      \#define Equation(p,q) = p+2*q
      void main()
       float A=3.2;B=4.1;
       C=Equation (A,B);
       cout<<'Output='<<C<<endl;
      }
Ans
      #define Equation(p,q) p+2*q
      void main()
       float A=3.2__, B=4.1;
       float C=Equation(A,B);
       cout<<<u>"Output="</u><<C<<endl;</pre>
      }
     (1/2 Mark for each correction)
     OR
     (1 mark for identifying the errors, without suggesting corrections)
```

CBSE AISSCE 2005360160 Marking Scholmsoft Computer Science

```
(d)
       Find and write the output of the following C++ program code:
                                                                              2
       Note: Assume all required header files are already included in the
       program.
       typedef char STRING[80];
       void MIXITNOW(STRING S)
         int Size=strlen(S);
         for (int I=0;I<Size-1;I+=2)</pre>
           char WS=S[I];
           S[I]=S[I+1];
           S[I+1]=WS;
         for (I=1;I<Size;I+=2)</pre>
           if (S[I] \ge M' \&\& S[I] \le U'
              S[I]='@';
       }
       void main()
         STRING Word="CRACKAJACK";
        MIXITNOW (Word);
         cout<<Word<<endl;
       }
Ans
      RCCAAKAJKC
     (2 Marks for correct output)
     (1/2 Mark for each of two correct consecutive alphabets not exceeding
     1½ marks )
      Find and write the output of the following C++ program code:
                                                                              3
(e)
      Note: Assume all required header files are already being included in the program.
      class Stock
       long int ID;
```

```
float Rate; int Date;
     public:
        Stock() {ID=1001; Rate=200; Date=1;}
       void RegCode(long int I,float R)
          ID=I; Rate=R;
       void Change(int New,int DT)
          Rate+=New; Date=DT;
       void Show()
          cout<<"Date :"<<Date<<endl;</pre>
          cout<<ID<<"#"<<Rate<<endl;
        }
     };
     void main()
       Stock A,B,C;
       A. RegCode (1024, 150);
       B.RegCode (2015, 300);
       B. Change (100, 29);
       C. Change (-20, 20);
       A. Show();
       B. Show();
        C.Show();
     }
Ans
     Date:1
     1024#150
     Date:29
     2015#400
     Date:20
     1001#180
     (1/2 Mark for each correct line of output)
     Note:
        Deduct only ½ Mark for not writing any or all 'Date' OR ':' OR '#'
        symbol(s)
     • Deduct ½ Mark for not considering any or all endl(s) at proper
```

CBSE AISSCE 2005365160warking Scholmoffw Computer Science

iv) following it. Also, write the name and the required header file function random(n) generates main() lomize(); CHANGER; IGER=random(3);	MUMBAI","KOLKATA","CHENNAI"}
<pre>lomize(); CHANGER; IGER=random(3); CITY[][25]={"DELHI","Note that it is a second content in the second cont</pre>	
cout< <city[j];< td=""><td>130 y 305</td></city[j];<>	130 y 305
	(ii)
	DELHI
MUMABAI	DELHIMUMABAI
MUMABAIKOLKATA	DELHIMUMABAIKOLKATA
	DELHIMUMABAIKOLKATACHENNAI
	(iv)
BAI	KOLKATA
BAIKOLKATA	KOLKATACHENNAI
BAIKOLKATACHENNAI	
MITIMB A T	
	IMUMABAI IMUMABAIKOLKATA BAI BAIKOLKATA BAIKOLKATA BAIKOLKATACHENNAI MUMBAI MUMBAIKOLKATA

```
Minimum Value of CHANGER = 0
          Maximum Value of CHANGER = 2
          (1 Mark for mentioning correct option)
          Note: No Mark to be awarded for writing any one additional option
          with (i).
          (1/2 Mark each for Minimum and Maximum Value of CHANGER)
2.
    (a)
           Differentiate between Constructor and Destructor functions giving suitable
          example using a class in C++. When does each of them execute?
    Ans
           PART 1:
           Constructor
                                              Destructor
           A constructor function has same name A destructor function has same name
           as the class
                                              as the class preceded by ~ symbol
           Example:
           class Exam
             int Eno; float Marks;
          public:
              Exam()
                                                    /Constructor
                  Eno=1; Marks = 100;
                  cout<<"Constructor executed..."<<endl;</pre>
              }
             void Show()
                 cout<<Eno<<"#"<<Marks<<endl;</pre>
             }
                                              //Destructor
             ~Exam()
                  cout<<"Exam Over"<<endl;</pre>
           };
           void main()
              Exam E; //Executes constructor
              E.Show();
```

```
//Executes Destructor
      OR
      Any other suitable example demonstrating difference between
      Constructor and Destructor functions.
      PART 2:
      Execution of Constructor and Destructor:
      Constructor
                                       Destructor
       A constructor executes by itself at
                                         A destructor executes by itself
       the time of object creation
                                         when the scope of an object
                                         ends
     PART 1:
      (1 Mark for correct example of constructor and destructor function)
      OR
      (1/2 Mark each for correct definition of constructor and destructor
     function)
     PART 2:
      (1 Mark for constructor and Destructor execution with/without
      example)
(b)
     Observe the following C++ code and answer the questions (i) and (ii). Assume all
     necessary files are included:
     class FICTION
        long FCode;
        char FTitle[20];
        float FPrice;
     public:
        FICTION()
                                              //Member Function 1
          cout<<"Bought"<<endl;
          FCode=100;strcpy(FTitle,"Noname");FPrice=50;
        }
        FICTION(int C,char T[],float P) //Member Function 2
          FCode=C;
          strcpy(FTitle,T);
```

```
FPrice=P;
        void Increase(float P)
                                               //Member Function 3
          FPrice+=P;
        void Show()
                                               //Member Function 4
           cout<<FCode<<":"<<FTitle<<":"<<FPrice<<endl;
       ~FICTION()
                                              //Member Function 5
           cout<<"Fiction removed!"<<end1;
        }
      };
                                                    //Line 1
      void main()
                                                    //Line 2
       FICTION F1, F2 (101, "Dare", 75);
                                                    //Line 3
                                                    //Line 4
       for (int I=0; I<4; I++)
                                                    //Line 5
         F1.Increase (20); F2.Increase (15);
                                                   //Line 6
                                                    //Line 7
         F1.Show(); F2.Show();
                                                    //Line 8
       }
                                                    //Line 9
      }
      Which specific concept of object oriented programming out of the following is
(i)
                                                                            1
      illustrated by Member Function 1 and Member Function 2 combined together?

    Data Encapsulation

    Data Hiding

    Polymorphism

    Inheritance

Ans
     Polymorphism
      (1Mark for mentioning the correct concept name)
     How many times the message "Fiction removed!" will be displayed after
(ii)
     executing the above C++ code? Out of Line 1 to Line 9, which line is responsible to
     display the message "Fiction removed!"?
```

CBSE AISSCE 2005320516 Wasking Scholm Office Computer Science

```
Ans
     2 times
     Line 9
     ( ½ Mark for writing correct number of times)
     ( ½ Mark for writing correct line number)
     Write the definition of a class METROPOLIS in C++ with following description:
                                                                       4
(c)
     Private Members
     - Mcode
                //Data member for Code (an integer)
     - MName //Data member for Name (a string)
     - MPop
               //Data member for Population (a long int)
               //Data member for Area Coverage (a float)
     - Area
     - PopDens //Data member for Population Density (a float)
     - CalDen() //A member function to calculate -----
                //Density as PopDens/Area
     Public Members
     - Enter() //A function to allow user to enter values of
                //Mcode, MName, MPop, Area and call CalDen()
                //function
     - ViewALL()//A function to display all the data members
                //also display a message "Highly Populated Area"
                //if the Density is more than 12000
Ans
     class METROPOLIS
       int Mcode;
       char MName[20];
       long int MPop;
       float Area;
       float PopDens;
       void CalDen();
     public:
       void Enter();
       void ViewALL();
     void METROPOLIS::Enter()
        cin>>Mcode;
        gets(MName); //OR cin>>MName;
        cin>>MPop;
        cin>>Area;
        CalDen();
```

```
}
     void METROPOLIS::ViewALL()
        cout<<Mcode<<MName<<MPop<<Area<<PopDens; //Ignore endl
        if (PopDens>12000)
          cout<<"Highly Populated Area";</pre>
                                                //Ignore endl
     void METROPOLIS::CalDen()
        PopDens= PopDens/Area; //OR PopDens = MPop/Area
     (1/2 Mark for correct syntax for class header)
     (1/2 Mark for correctly ending the class declaration with a semicolon)
     (1/2 Mark for correct declaration of data members)
     (1/2 Mark for correct definition of CalDen() function)
     (1 Mark for correct definition of Enter() with proper invocation of
     CalDen() function)
     (1 Mark for correct definition of ViewALL())
     NOTE:
      • Deduct ½ Mark if CalDen() is not invoked properly inside Enter()
        function

    Marks not to be deducted if any or all the member functions are

         defined inside the class

    Marks not to be deducted if Density is declared as an extra data

         member and calculated as Density=PopDens/Area inside
         CalDen() function

    Marks not to be deducted if Density is declared as an extra data

                   and checked as if (Density>12000) in lieu of
         if (PopDens>12000) inside ViewALL() function
(d)
     Answer the questions (i) to (iv) based on the following:
                                                                          4
     class PRODUCT
      {
      int Code;
      char Item[20];
     protected:
       float Qty;
     public:
        PRODUCT();
```

CBSE AISSCE 2008320516 Wasking Scholm Softw Computer Science

```
void GetIn(); void Show();
      };
      class WHOLESALER
        int WCode;
      protected:
        char Manager[20];
      public:
        WHOLESALER();
        void Enter();
        void Display();
      class SHOWROOM : public PRODUCT, private WHOLESALER
        char Name[20],City[20];
      public:
        SHOWROOM();
        void Input();
        void View();
      };
  (i) Which type of Inheritance out of the following is illustrated in the above example?

    Single Level Inheritance

    Multi Level Inheritance

           Multiple Inheritance
Ans
     Multiple Inheritance
     (1 Mark for writing correct option)
  (ii) Write the names of all the data members, which are directly accessible from the
     member functions of class SHOWROOM.
      Name, City, Manager, Qty
Ans
      (1 Mark for correct answer)
     Note:
     No marks to be awarded for any partial answer
 (iii) Write the names of all the member functions, which are directly accessible by an
     object of class SHOWROOM.
Ans
     Input(), View(), GetIn(), Show()
```

CBSE AISSCE 2005365160warking Scholmoffw Computer Science

		(1 Mark for correct answer)					
	Note: No marks to be awarded for any partial answer Ignore constructor functions						
	(iv)	What will be the order of execution of the constructors, when an object of class SHOWROOM is declared?					
	Ans (i) PRODUCT() (ii) WHOLESALER() (iii) SHOWROOM() (1 Mark for writing correct order) Note: • No Marks to be awarded for any other combination/order. • Names of the constructor/class without parenthesis is acceptable.						
3	(a)	Write the definition of a function FixPay(float Pay[], int N) in C++, which should modify each element of the array Pay having N elements, as per the following rules:		2			
		Existing Value of Pay	Pay to be changed to				
		If less than 100000	Add 25% in the existing value				
		If >=100000 and <20000	Add 20% in the existing value				
		If >=200000	Add 15% in the existing value				
		1,5					
	Ans	<pre>void FixPay(float Pay[], int N) { for (int i=0;i<n;i++) (pay[i]="" *="" else="" if="" if(pay[i]<100000)="" pay[i]+="0.25" pay[i];="">=100000 && Pay[i]<20000) Pay[i]+= 0.2 * Pay[i]; else if(Pay[i]>=200000) Pay[i]+= 0.15 * Pay[i]; } OR Any other correct equivalent function definition</n;i++)></pre>					
		(½ Mark for correctly writing the loop)					

```
( ½ Mark for checking at least one or all of the conditions correctly)
     (1 Mark for correct increment of Pays for all conditions)
     OR
     ( ½ Mark for incrementing only one of the pays correctly)
      Note:
         • Marks not to be deducted for writing second condition check for
           the range as >=100000 \&\& < 200000 instead of >=100000 \&\&
           <20000

    Marks not to be deducted for incrementing Salary as

        Pay[i]+= Pay[i]*20/100; OR Pay[i]+= 20/100*Pay[i];
        and likewise for all increments
     T[20][50] is a two dimensional array, which is stored in the memory along the row
(b)
     with each of its element occupying 4 bytes, find the address of the element
     T[15][5], if the element T[10][8] is stored at the memory location 52000.
Ans
     Loc(T[I][J])
           =BaseAddress + W [(I - LBR)*C
                                                + (J - LBC)]
      W=size of each element = 4 bytes,
     R=Number of Rows=20, C=Number of Columns=50)
     Assuming LBR = LBC = 0
      LOC(T[10][8])
          52000 = BaseAddress + W[I*C + J]
          52000 = BaseAddress + 4[10*50 + 8]
          52000 = BaseAddress + 4[500 + 8]
          52000 = BaseAddress + 4 \times 508
          BaseAddress = 52000 - 2032
                        = 49968
      LOC(T[15][5]) = BaseAddress + W[I*C + J]
                     = 49968 + 4[15*50 + 5]
                     = 49968 + 4[750 + 5]
                     = 49968 + 4 \times 755
                     = 49968 + 3020
                    = 52988
      OR
     Loc(T[I][J])
           =ReferenceAddress + W [( I - LR) *C + (J - LC)]
      (where
```

```
W=size of each element = 4 bytes,
      R=Number of Rows=20, C=Number of Columns=50)
     ReferenceAddress= Address of given cell T[10][8]=52000
      LR = Row value of given cell = 10
      LC = Column value of given cell = 8
     LOC(T[15][5]) = LOC(T[10][8]) + 4[(15 - 10)*50 + (5 - 8)]
      LOC(T[15][5]) = 52000 + 4[5*50 + (-3)]
                      = 52000 + 4[250 -3]
                      = 52000 + 4 \times 247
                      = 52000 + 988
                = 52988
     (1 Mark for writing correct formula (for Row major) OR substituting
     formula with correct values)
     (1Mark for correct calculation)
     (1 Mark for final correct address)
     Write the definition of a member function INSERT() for a class QUEUE in C++, to
(c)
     insert an ITEM in a dynamically allocated Queue of items considering the following
     code is already written as a part of the program.
                                OJESTIONSA
     struct ITEM
      int INO; char INAME[20];
      ITEM *Link;
     };
     class QUEUE
      ITEM *R,*F;
     public:
      QUEUE() {R=NULL;F=NULL;}
      void INSERT();
      void DELETE();
     ~QUEUE();
     };
Ans
     void QUEUE::INSERT()
```

```
ITEM *T = new ITEM;
        cin>>T->INO;
                              //OR cin>> T->INAME;
        gets(T->INAME);
        T->Link = NULL;
        if (R==NULL)
           F=T;
                    R=T;
        }
        else
          R->Link=T;
                            R=T;
      }
      (1 Mark for creating a new node)
      ( ½ Mark for entering data for the new node)
      ( 1/2 Mark for assigning NULL to link of the new node)
      ( \frac{1}{2} Mark for assigning Front to the first node as F = T)
      ( ½ Mark for linking the last node to the new node as R->Link =T)
      (1 Mark for assigning Rear to the new node as R = T)
      Write definition for a function SHOWMID(int P[][5], int R, int C) in C++ to display the
(d)
      elements of middle row and middle column from a two dimensional array P having
      R number of rows and C number of columns.
      For example, if the content of array is as follows:
               115
                      112
                              116
                                     101
                                            125
               103
                      101
                              121
                                     102
                                            101
              185
                      109
                              109
                                     160
                                            172
      The function should display the following as output:
      103 101 121 102 101
      116 121 109
ANS
     void SHOWMID(int P[][5],int R,int C)
        for (int J=0; J<C; J++)
            cout<<P[R/2][J]<< " ";
        cout<<endl;
        for (int I=0;I<R;I++)</pre>
```

```
cout<<P[I][C/2]<< " ";
     }
     OR
     void SHOWMID(int P[][5],int R,int C)
     {
        if(R%2!=0)
          for (int J=0; J<C; J++)
            cout<<P[R/2][J]<< " ";
        }
        else
          cout<<"No Middle Row";</pre>
        cout<<endl;</pre>
        if(C%2!=0)
          for (int I=0;I< R;I++)
           cout<<P[I][C/2]<< " ";
        }
        else
          cout<<"No Middle Column";
     }
     OR
     Any other correct equivalent function definition
     ( ½ Mark for correct loop for displaying middle row elements)
     (1 Mark for correct statement to display middle row elements)
     ( ½ Mark for correct loop for displaying middle column elements)
     (1 Mark for correct statement to display middle column elements)
     Convert the following Infix expression to its equivalent Postfix expression, showing
(e)
     the stack contents for each step of conversion.
     A/(B+C)*D-E
Ans
      A/(B+C)*D-E
      = (((A / (B+C)) * D) - E)
       Element
                      Stack of Operators
                                                Postfix Expression
```

CBSE AISSCE 2005320516 Wasking Scholmoftw Computer Science

(Sub Code: 083 Paper Code 91/1 Delhi)

	1	1
(
(
A		A
/	/	A
(/	A
В	/	AB
+	/+	AB
С	/+	ABC
)	/	ABC+
)		ABC+/
*	*	ABC+/
D	*	ABC+/D
)		ABC+/D*
_	-	ABC+/D*
E		ABC+/D*E
)	14	ABC+/D*E-

= ABC+/D*E-

OR

A/(B+C)*D-E

= (A / (B+C) * D - E)

- (A / (B+C) " D - E)				
Element	Stack of Operators	Postfix Expression		
((5			
A	(A		
/	(/) (-)	A		
((/(A		
В	(/(AB		
+	(/(+	AB		
С	(/(+	ABC		
)	(/	ABC+		
*	(*	ABC+/		
D	(*	ABC+/D		
_	(-	ABC+/D*		
E	(-	ABC+/D*E		
)		ABC+/D*E-		

= ABC+/D*E-

```
OR
           Any other method for converting the given infix expression to its
           equivalent postfix expression showing stack contents.
          (1/2 Mark for correctly converting till each operator)
          OR
          (1 Mark to be given for writing correct answer without showing the
          stack content on each step)
          Write function definition for WORD4CHAR() in C++ to read the content of a text
                                                                                   2
    (a)
4.
          file FUN.TXT, and display all those words, which has four characters in it.
          Example:
          If the content of the file fun. TXT is as follows:
          When I was a small child, I used to play in the garden
           with my grand mom. Those days were amazingly funful
           and I remember all the moments of that time
          The function WORD4CHAR() should display the following:
          When used play with days were that time
     Ans
           void WORD4CHAR()
              ifstream Fil;
              Fil.open("FUN.TXT");
              char W[20];
              Fil>>W;
                                       //OR while(Fil)
              while (!Fil.eof())
                 if (strlen(W)) == 4 ) //Ignore words ending with '.'
                   cout<<W<< " ";
                 Fil>>W;
              Fil.close();
                                  //Ignore
           }
           OR
           Any other correct function definition
           (1/2 Mark for opening FUN.TXT correctly)
           (1/2 Mark for reading each word (using any method) from the file)
```

```
(1/2 Mark for checking length of the extracted word to be of 4 letters)
      (1/2 Mark for displaying the 4 letter extracted word correctly)
(b)
      Write a definition for function BUMPER() in C++ to read each object of a binary
                                                                              3
      file GIFTS.DAT, find and display details of those gifts, which has remarks as "ON
      DISCOUNT". Assume that the file GIFTS.DAT is created with the help of objects of
      class GIFTS, which is defined below:
      class GIFTS
       int ID; char Gift[20], Remarks[20]; float Price;
      public:
       void Takeonstock()
         cin>>ID;gets(Gift);gets(Remarks);cin>>Price;
       }
       void See()
         cout<<ID<<":"<<Gift<<":"<<Price<<"":"<<Remarks<<endl;
       }
       char *GetRemarks() {return Remarks;}
      };
Ans
      void BUMPER()
      {
        GIFTS G;
        ifstream fin;
        fin.open("GIFTS.DAT", ios::binary);
        while(fin.read((char*)&G, sizeof(G)))
           if(strcmp(G.GetRemarks(),"ON DISCOUNT")==0)
              G. See ();
         fin.close(); //Ignore
      }
      OR
      Any other correct function definition
      (1Mark for opening GIFTS .DAT correctly)
      (½ Mark for reading records from GIFTS.DAT)
      (1/2 Mark for comparing Remarks with ON DISCOUNT (ignore case sensitive
      checking))
      (1 Mark for displaying record)
```

```
(c)
           Find the output of the following C++ code considering that the binary file MEM.DAT
           exists on the hard disk with a data of 1000 members.
           class MEMBER
            int Mcode;char MName[20];
           public:
            void Register();void Display();
           };
           void main()
            fstream MFile;
            MFile.open("MEM.DAT",ios::binary|ios::in);
            MEMBER M;
            MFile.read((char*)&M, sizeof(M));
            cout<<"Rec:"<<MFile.tellq()/sizeof(M)<<endl;</pre>
            MFile.read((char*)&M, sizeof(M));
            MFile.read((char*) &M, sizeof(M));
            cout<<"Rec:"<<MFile.tellg()/sizeof(M)<<endl;</pre>
            MFile.close();
     Ans
          Rec:1
          Rec:3
           (1/2 Mark for each correct value of MFile.tellg()/sizeof(M) as 1 and 3
          respectively)
SECTION B - (Only for candidates, who opted for Python)
           Out of the following, find those identifiers, which can not be used for naming
    (a)
           Variable or Functions in a Python program:
           Cost, Price*Qty, float, Switch,
           Address One, Delete, Number12, do
    Ans
           Price*Qty, float, Address One, do
           (1/2 Mark for each correct name)
           Note:
           Deduct 1/2 Mark for each wrong name written
    (b)
           Name the Python Library modules which need to be imported to invoke the
           following functions
           (i) load()
           (ii) pow()
```

Ans	(i) pickle (ii) math				
	(½ Mark for writing each correct Library Note: Ignore any other Library modules, i	,			
(c)	Rewrite the following code in python after remeach correction done in the code. for Name in [Amar, Shveta, Parag] IF Name[0]='S': print(Name)	•			
Ans	<pre>for Name in [<u>"Amar", "Shveta", "Para if Name[0] == 'S': print(Name)</u></pre>	ng"] : // ` ` can be used			
	(½ Mark for each correction) OR (1 mark for identifying the errors, withou	t suggesting corrections)			
(d)	(d) Find and write the output of the following python code:				
	<pre>Numbers=[9,18,27,36] for Num in Numbers: for N in range(1, Num%8): print(N,"#",end="") print()</pre>				
Ans	1# 1# 2# (1 #) (1 #) (2 #) (1 #) (2 #) (1 #) (2 #) (3 #)	() (1 #) (1 # 2 #) (1 # 2 # 3 #) 1# 1#2# 1#2# 1#2#3#			
	(2 marks for correct output) OR (½ mark for each correct value with '#' n OR	ot exceeding 2 Marks)			


CBSE AISSCE 2005360160Wasking Schemofby Computer Science

```
(2 mark for mentioning the syntax error in line
      print(N,"#",end=<mark>""</mark>))
                                                                                 3
(e)
      Find and write the output of the following python code:
         def init (self, N=100, Nt="CBSE"): #constructor
             self.Nno=N
             self.NName=Nt
         def Allocate(self, N,Nt):
             self.Nno= self.Bno + N
             self.NName= Nt + self.NName
         def Show(self):
             print(self.Nno,"#",self.NName)
      s=Notes()
      t=Notes (200)
      u=Notes(300,"Made Easy")
      s.Show()
      t.Show()
      u.Show()
      s.Allocate(4, "Made ")
      t.Allocate(10, "Easy ")
      u.Allocate(25,"Made Easy")
      s.Show()
      t.Show()
      u.Show()
Ans
       Python 2.7 output
                                        Other Versions output
       100 # CBSE
                                        (100, '#', 'CBSE')
       200 # CBSE
                                        (200, '#', 'CBSE')
       300 # Made Easy
                                        (300, '#', 'Made Easy')
                                        (104, '#', 'Made CBSE')
       104 # Made CBSE
                                        (210, '#', 'Easy CBSE')
       210 # Easy CBSE
                                        (325, '#', 'Made EasyMade Easy')
       325 # Made EasyMade Easy
       (1/2 Mark for each correct line of output)
       Note:

    Deduct ½ Mark for not writing any or all '#' symbol(s)

       • Deduct ½ Mark for not considering any or all line breaks at proper
        place(s)
      What are the possible outcome(s) executed from the following code? Also specify
                                                                                2
(f)
      the maximum and minimum values that can be assigned to variable PICKER.
```

		<pre>import random PICK=random.randint(0,3) CITY=["DELHI","MUMBAI","CHI for I in CITY: for J in range(1,PICK): print(I,end="") print()</pre>	ENNAI","KOLKATA"];	
		(i)	(ii)	
		DELHIDELHI	DELHI	
		MUMBAIMUMBAI	DELHIMUMBAI	
		CHENNAICHENNAI	DELHIMUMBAICHENNAI	
		KOLKATAKOLKATA		
		(iii)	(iv)	
		DELHI	DELHI	
		MUMBAI	MUMBAIMUMBAI	
		CHENNAI	KOLKATAKOLKATA	
		KOLKATA	3	
	Ans	Option (i) and (iii) are possible OR Option (i) only PICK maxval=3 minval=0	OUESTION BAN	
		(1 Mark for mentioning correct Note: No marks to be awarded (1/2 Mark each for Minimum and	for writing any other option.	
2	(a)	What is the difference between Muexamples to illustrate both.	ultilevel and Multiple inheritance? Give suitable	2
	Ans			
		Multilevel inheritance	Multiple inheritance	

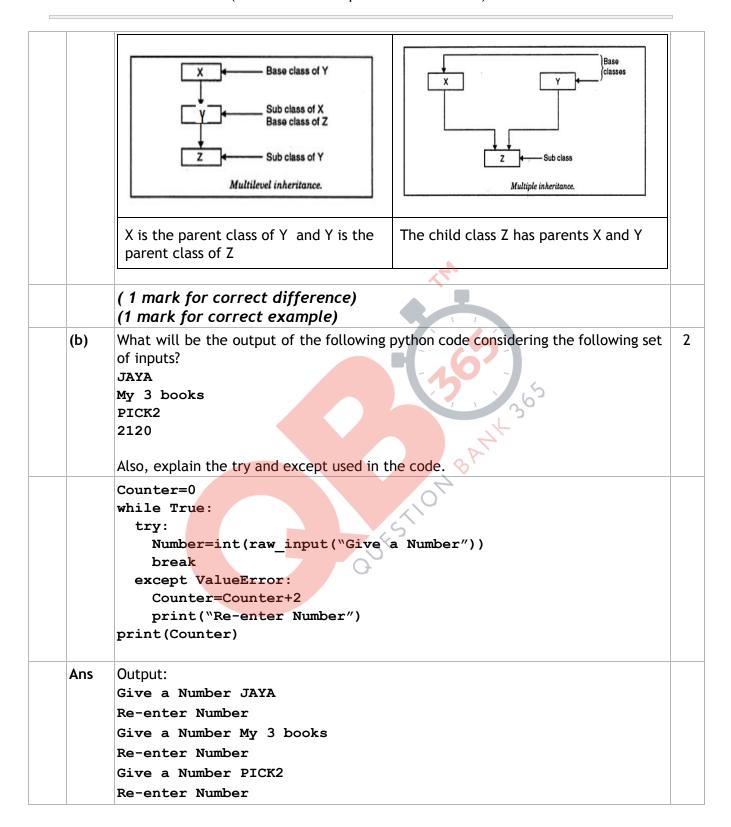

```
Give a Number 2120
      Explanation: The code inside try makes sure that the valid number is entered by
      the user. When any input other than an integer is entered, a value error is thrown
      and it prompts the user to enter another value.
      (1/2 mark for correct output for text entry)
      (1/2 mark for correct output for number entry)
      (1 mark for correct explanation of try and except)
                                                                             4
(c)
      Write a class CITY in Python with following specifications
      Instance Attributes
      - Code
               # Numeric value
               # String value
      - Name
                # Numeric value for Population
      - Pop

    KM

                 # Numeric value
      - Density # Numeric value for Population Density
      Methods:
      - CalDen() # Method to calculate Density as Pop/KM
      - Record() # Method to allow user to enter values
                    Code, Name, Pop, KM and call CalDen() method
                 # Method to display all the members also display
      - See()
                   a message "Highly Populated Area"
                   if the Density is more than 12000.
Ans
      class CITY:
         def init (self):
           self.Code = 0
           self.Name = ""
           self.Pop = 0
           self.KM = 0
           self.Density=0
        def CalDen(self):
           self.Density = self.Pop / self.KM
        def Record(self):
           self.Code = input("Enter Code")
           self.Name = raw input("Enter Name")
           self.Pop = input("Enter population")
           self.KM = input("Enter KM")
           CalDen(self)
                                           // or self.CalDen()
        def See(self):
```

	<pre>print Code,Name,Pop, KM, Density if self.Density > 12000: print("Highly Populated Area") # OR print("Highly populated Area")</pre>
	Note: Accept selfCode to indicate private members
	(½ Mark for correct syntax for class header) (1 Mark for correct declaration of instance attributes) (½ Mark for correct definition of CalDen() function) (1 Mark for correct definition of Record() with proper invocation of CalDen() function) (1 Mark for correct definition of See()) NOTE: Deduct ½ Mark if CalDen() is not invoked properly inside Record() function
(d)	How do we implement abstract method in python? Give an example for the same.
Ans	Abstract method: An unimplemented method is called an abstract method. When an abstract method is declared in a base class, the derived class has to either define the method or raise "NotImplementedError" class Shape(object): def findArea(self): pass class Square(Shape): definit(self,side): self.side = side def findArea(self): return self.side * self.side
	(1 mark for correct explanation) (1 mark for correct example) Note: We can use @abstractmethod to enable parent class method to be executed.
(e)	What is the significance of super() method? Give an example for the same.
Ans	super() function is used to call base class methods which has been extended in derived class. EX:
	class GradStudent(Student):

		def re	finit(se super(Grads self.subject self.working eadGrad (se t Call readSt uper(GradS	Student, sel := "" g = " lf): <u>tudent met</u> l	hod of pare	nt class			
		(1 mark fo		•	•				
3.	(a)	of the insedescending 22, 24, -	ertion sort order? 64, 34, 8 the status	method u	ised for a	rranging th	ne following	and Third pag elements	in
	Ans		22	24	-64	- 34	- 80	43	
		Pass 1	24	22	-64	34	80	43	
		Pass 2	24	22	-64	34	∟ 80	43	
		Pass 3	34	24	22	-64	80	43	
		(1 mark fo	or each co	rrect pass	5)	4			
	(b)	_	with the h	nelp of Bina	ary Search	method. T	he method	thon to sear should retu the list.	
	Ans	def binar high = low =0 while mid midv if m lo elif hi	low < high low < high e (low + ral = nums hidval > r midval < midval < gh = mid	ns,x): gh: high)//2 s[mid] k:	0				
		(½ mark f (½ mark f	_	•	_	•			

CBSE AISSCE 2015320516 Quanting Scholm Computer Science

```
( ½ mark for calculation of Mid)
      ( ½ mark for changing high/ub and low/lb)
      Write Insert(Place) and Delete(Place) methods in python to add Place and Remove
(c)
      Place considering them to act as Insert and Delete operations of the data structure
      Queue.
Ans
      class queue:
         place = [ ]
         def insert(self):
            a = raw_input("Enter place")
            queue.place.append(a)
         def delete(self):
            if (queue.place == [ ] ):
              print "Queue empty"
              print "Deleted element is", queue.place[0]
               queue.place.delete()
      OR
      class queue:
         place = [ ]
         def insert(self):
            a = raw_input("Enter place")
            queue.place.append(a)
         def delete(self):
            if (queue.place == [ ] ):
              print("Queue empty")
            else:
              print("Deleted element is", queue.place[0])
              queue.place.delete()
      ( ½ mark insert header)
      ( ½ mark for accepting a value from user)
      ( ½ mark for adding value in list)
      ( ½ mark for delete header)
      ( ½ mark for checking empty list condition)
      ( ½ mark for displaying "Empty Message")
      Write a method in python to find and display the prime numbers between 2 to N.
(d)
                                                                                 3
      Pass N as argument to the method.
      def prime(N):
Ans
         for a in range(2,N):
          for I in range(2,a):
             if N\%i ==0:
                 break
```

CBSE AISSCE 2015/20516 Owarking Scholm Computer Science

		print a	ı		
		OR			
		def prime N	1:		
		for a in	range 2,N:		
			in range 2,a:		
			%i ==0:		
		else:	eak		
		print	a a		
			nction header	½ mark for Divisibility check.	
		½ mark firs		01 mark for Displaying view.	
			r second loop	a mark jor bisplaying view.	
		•	•		
	е	Evaluate the every operation		pression. Show status of stack after	2
			4,10,-,+,5,-		
		22,11,7,1	7,10, ,1,0,		
	Ans			10	
		Element	Stack	() () () () () () () () () ()	
		22	22	3	
		11	22, 11	4	
		/	2	84	
		14	2, 14	4	
		10	2, 14, 10	Θ	
		_	2, 4	-	
			6		
		5			
		5	6, 5		
		_	1		
		Final Result :	= 1		
		½ Mark for e	valuation till each operator)		
		OR			
		1 Mark for o	nly writing the Final answer wi	thout showing stack status	
4	a)		ment in Python to perform the fo		1
			en a text file "BOOK.TXT" in read		
		<u> </u>	en a text file "BOOK.TXT" in writ	е тове	
	Ans	-	"BOOK_TXT",'r'		
		rz = open	"BOOK_TXT", 'w'		

CBSE AISSCE 2005360160Wasking Schemofby Computer Science

```
( ½ Mark for each correct statement)
      Write a method in python to write multiple line of text contents into a text file
(b)
                                                                                   2
      myfile.txt line.
Ans
       def writel():
            f = open("myfile.txt",'w')
            while True:
                 line = raw input("Enter line")
                 f.write(line)
                 choice = raw input("Are there more lines")
                 if choice == 'N':
                    break;
            f.close()
      Note: Using writelines() is also correct
      (1/2 Mark for opening file in appropriate mode)
      (1/2 Mark for end of file check and loop)
      (1/2 Mark for taking input from user)
      (1/2 Mark for writing the line into the file)
      Consider the following definition of class Staff, write a method in python to search
                                                                                   3
(c)
      and display the content in a pickled file staff.dat, where Staffcode is matching
      with 'S0105'.
      class Staff:
           def init (self,S,SNM):
                self.Staffcode=S
                self.Name=SNM
           def Show(self):
               print(self.Staffcode," - ", self.Name)
Ans
      def search():
        f = open("staff.dat", 'rb')
        try:
           while True:
             e = pickle.load(f)
             if e.Staffcode == 'S0105':
                e.Show()
        except EOFError:
               pass
        f.close()
      (1/2 Mark for correct function header)
      (1/2 Mark for opening the file staff.dat correctly)
      (1/2 Mark for correct file check and loop)
```

		(1/2 Mc	ark for correct load()) ark for correct checking ark for displaying the re	,				
SE	CTION	C - (F	or all the candidat	tes)				
5	(a)	of the	ve the following STUDEN RDBMS operation which find the Degree and Car	will be used to	o prod		•	
			STUDENTS			ΕV	/ENTS	
		NO	NAME		EVEN	TCODE	EVENTNAME	-
		1	Tara Mani		1001	•	Programming	1
		2	Jaya Sarkar		1002		IT Quiz	
		3	Tarini Trikha				1	
				LIST		6		
		NO	NAME	EVENT	CODE	EVENTN	AME	
		1	Tara Mani	1001	77	Program	ming	
		1	Tara Mani	1002		IT Quiz	3	
		2	Jaya Sarkar	1001		Program	ming	
		2	Jaya Sarkar	1002		IT Quiz		
		3	Tarini Trikha	1001	4	Program	ming	
		3	Tari <mark>ni Trikh</mark> a	1002	0	IT Quiz		
				15				
	Ans	Carte	esian <mark>Prod</mark> uct	7-0-0				
		_	ee = 4 inality = 6					
		(1/2 M	ork for writing the cor ark for writing correc ark for writing correc	t value of de	egree)	ration)	
	(b)		SQL queries for (i) to are based on the tables	` '	output	s for SQ	L queries (v) to (viii),	
		Table	: VEHICLE					
		CODI	VTYPE	PERKM				
		101	VOLVO BUS	160				

	102	AC DELUXE BU	IS 150			
	103	ORDINARY BUS	90			
	105	suv	40			
	104	CAR	20			
	•	PERKM is Freight VTYPE is Vehicle TRAVEL	<u> </u>	ometer		
	NO	NAME	TDATE	KM	CODE	NOP
	101	Janish Kin	2015-11-13	200	101	32
	103	Vedika Sahai	2016-04-21	100	103	45
	105	Tarun Ram	2016-03-23	350	102	42
	102	John Fen	2016-02-13	90	102	40
	107	Ahmed Khan	2015-01-10	75	104	2
	104	Raveena	2016-05-28	80	105	4
	106	Kripal Anya	2016-02-06	200	101	25
(i)	•	KM is Kilometer to NOP is number of TDATE is Travel I lay NO, NAME, TD.	f travellers trave	2		der of NO.
Ans		NO, NAME, TO	ATE FROM TRAV	EL		
	1 1	k for SELECT N		ATE FROM TE	RAVEL)	
(ii)		lay the NAME of g by vehicle with			table TRAVE	EL who are
Ans	WHERE OR SELECT	NAME FROM TRACODE=\101' OR NAME FROM TRACODE=101 OR CO	CODE='102';			

```
OR
     SELECT NAME FROM TRAVEL
     WHERE CODE IN ('101','102');
     OR
     SELECT NAME FROM TRAVEL
     WHERE CODE IN (101,102);
     (1/2 Mark for correct SELECT)
     (1/2 Mark for correct WHERE )
 (iii) To display the NO and NAME of those travellers from the table TRAVEL who
     travelled between '2015-12-31' and '2015-04-01'.
Ans
      SELECT NO, NAME from TRAVEL
     WHERE TDATE >= '2015-04-01' AND TDATE <= '2015-12-31';
     OR
      SELECT NO, NAME from TRAVEL
     WHERE TDATE BETWEEN '2015-04-01' AND '2015-12-31';
     OR
      SELECT NO, NAME from TRAVEL
     WHERE TDATE <= 2015-12-31' AND TDATE >= 2015-04-01';
     OR
     SELECT NO, NAME from TRAVEL
     WHERE TDATE BETWEEN '2015-12-31' AND '2015-04-01';
     (1/2 Mark for correct SELECT)
     (1/2 Mark for correct WHERE )
 (iv) To display all the details from table TRAVEL for the travellers, who have
     travelled distance more than 100 KM in ascending order of NOP.
Ans
     SELECT * FROM TRAVEL
     WHERE KM > 100 ORDER BY NOP;
     (1/2 Mark for correct SELECT)
     (1/2 Mark for correct WHERE )
  (v) SELECT COUNT (*), CODE FROM TRAVEL
     GROUP BY CODE HAVING COUNT(*)>1;
Ans
       COUNT(*)
                     CODE
       2
                     101
       2
                     102
      (½ Mark for correct output)
```


	(vi)	SELECT DISTINCT CODE FROM TRAVEL;	
	Ans	DISTINCT CODE 101 102 103 104 105 (½ Mark for correct output) Note: Ignore the order	
	(vii)	SELECT A.CODE, NAME, VTYPE FROM TRAVEL A, VEHICLE B WHERE A.CODE=B.CODE AND KM<90;	
	Ans	CODE NAME VTYPE 104 Ahmed Khan CAR 105 Raveena SUV (1/2 Mark for correct output)	
	(viii)	SELECT NAME, KM*PERKM FROM TRAVEL A, VEHICLE B WHERE A. CODE=B. CODE AND A. CODE='105';	
	Ans	NAME KM*PERKM Raveena 3200 (1/2 Mark for correct output)	
6	a.	Verify the following using Boolean Laws. A' + B' .C = A' .B' .C' + A' .B.C' + A' .B.C + A' .B' .C + A.B' .C	2
		LHS A' + B'.C = A'.(B + B').(C + C') + (A + A').B'.C = A'.B.C + A'.B.C' + A'.B'.C + A'.B'.C' + A.B'.C + A'.B'.C = A'.B.C + A'.B.C' + A'.B'.C + A'.B'.C' + A.B'.C = A'.B'.C' + A'.B.C' + A'.B.C + A'.B'.C + A.B'.C = RHS OR RHS = A'.B'.C' + A'.B.C' + A'.B.C + A'.B'.C + A.B'.C = A'.B'.C + A'.B'.C' + A'.B.C + A'.B.C' + A.B'.C = A'.B'.C + A'.B'.C' + A'.B.C + A'.B.C' + A.B'.C = A'.B'.C + A'.B'.C' + A'.B.C + A'.B.C' + A.B'.C = A'.B'.C+C') + A'.B.(C+C') + A.B'.C = A'.B'.C + A'.B + A.B'.C = A'.B'.C+B) + A.B'.C	

	= (A' + A). (A' + B'.C) = A' + B'.C = LHS (2 Marks for correct Verification) OR (1 Mark for expanding LHS up to 1 correct step) OR (1 Mark for reducing RHS up to 1 correct step)
b.	Write the Boolean Expression for the result of the Logic Circuit as shown below:
Ans	((U + V').(U + W)). (V + W') OR (U + V').(U + W). (V + W')
	(2 Marks for correctly writing the full expression)
	(2 Marks for correctly writing the full expression) OR
c.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: PQRF(P,Q,R) 0 0 0 0
c.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: PQRF(P,Q,R) 0 0 0 0 0 1 1
c.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: PQRF(P,Q,R) 0 0 0 0 0 0 0 1 1 1 0 1 0 1
C.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: PQRF(P,Q,R) 0 0 0 0 0 0 1 1 0 1 0 1 0 1 0 0
C.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: P
c.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: P
c.	(2 Marks for correctly writing the full expression) OR (½ Mark each for correctly writing any one term) Derive a Canonical POS expression for a Boolean function F, represented by the following truth table: PQR F(P,Q,R) 0 0 0 0 0 0 0 1 1 0 1 0 1 0 1 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0

		Note: Deduct ½ mark if wrong variable names are used					
	d.	Reduce the following Boolean Expressio	n to its simplest form using K-Map:				
		F(X,Y,Z,W) = (2,6,7,8,9,10,11,13,14,15)					
	Ans						
		X'Y' X'Y X Y X Y'	OR z'w' z'w zw zw'				
		Z'W' 0 4 12 1 8	X'Y' 0 1 3 1 2				
		Z'W 1 5 1 13 1 9	X'Y 4 5 1 7 1 6 X Y 12 1 13 1 15 1 14				
		Z W 3 1 7 1 15 1 11 X Y 12 1 Z W 1 2 1 5 1 14 1 10 X Y 1 1 1					
		F(X,Y,Z,W) = XY' + ZW' + XW +	V7 67				
		(½ Mark for drawing K-Map with (½ Mark each for 4 groupings)	correct variable names)				
		1 72 Mulk Euch Joh 7 Vioubilivs					
		(½ Mark for writing final express	ion in reduced/minimal form)				
		(½ Mark for writing final express	\&'				
			\&'				
7	(a)	(½ Mark for writing final express Note: Deduct ½ mark if wrong vari	iable names are written in the				
7	(a)	(½ Mark for writing final express Note: Deduct ½ mark if wrong vari expression	iable names are written in the				
7		(½ Mark for writing final express Note: Deduct ½ mark if wrong variexpression Give two examples of PAN and LAN type PAN Examples	of networks. LAN Examples				
7		(½ Mark for writing final express Note: Deduct ½ mark if wrong variexpression Give two examples of PAN and LAN type	of networks.				
7		(½ Mark for writing final express Note: Deduct ½ mark if wrong variexpression Give two examples of PAN and LAN type PAN Examples Connecting two cell phones to	of networks. LAN Examples				
7		(1/2 Mark for writing final express Note: Deduct 1/2 mark if wrong varie expression Give two examples of PAN and LAN type PAN Examples Connecting two cell phones to transfer data Connecting smartphone to a smart	iable names are written in the of networks. LAN Examples Connecting computers in a school Connecting computers in an office				
7		(1/2 Mark for writing final express Note: Deduct 1/2 mark if wrong varie expression Give two examples of PAN and LAN type PAN Examples Connecting two cell phones to transfer data Connecting smartphone to a smart watch Note: Any one example of each OR	iable names are written in the of networks. LAN Examples Connecting computers in a school Connecting computers in an office for each of PAN and LAN examples of PAN)				

Ans	Protocol: HTTP OR TCP/IP Browser: Chrome OR Internet Explo OR any other correct Browser Name	rer OR Firefox OR OPERA OR SAFARI		
	(½ Mark for any one correct protocol name) (½ Mark for any one correct browser name)			
(c)	Write two advantages of 4G over 3G Moterms of speed and services?	bile Telecommunication Technologies in		
Ans	4G	3G		
	Speed approximately 100 mbps LTE True mobile broadband	Speed approximately 2 mbps Data services with multimedia		
	OR Any other two correct advantages o services	f 4G over 3G in terms of speed and		
	(½ Mark for each correct advantage	(e) (5)		
(d)	Write two characteristics of Web 2.0.			
Ans	 Makes web more interactive throug Supports easy online information ex Interoperability on the internet Video sharing possible in the websit OR Any two of the above or any other two 	tes		
	(½ Mark each for any two correct cha	racteristics)		
	What is the basic difference between Tro	jan Horse and Computer Worm?		
(e)				
(e) Ans				
<u> </u>	Trojan Horse	Computer Worm		

	OR Any other correct difference between Trojan Horse and Computer Worm	
	(1 Mark for writing correct difference between Trojan Horse and Computer Worm) OR (½ Mark for writing correct explanation of Trojan Horse) OR (½ Mark for writing correct explanation of Computer Worm)	
(f)	Categories the following under Client side and Server Side script category? (i) VB Sript (ii) ASP (iii) JSP (iv) Java Script	1
Ans	Client Side Scripts VB Script Java Script (1 Mark for correct answer) OR	
(g)	(½ Mark for any two correct client/server side script names) Uplifting Skills Hub India is a knowledge and skill community which has an aim to uplift the standard of knowledge and skills in the society. It is planning to setup its training centers in multiple towns and villages pan India with its head offices in the nearest cities. They have created a model of their network with a city, a town and 3 villages as follows. As a network consultant, you have to suggest the best network related solutions for their issues/problems raised in (i) to (iv), keeping in mind the distances between various locations and other given parameters.	

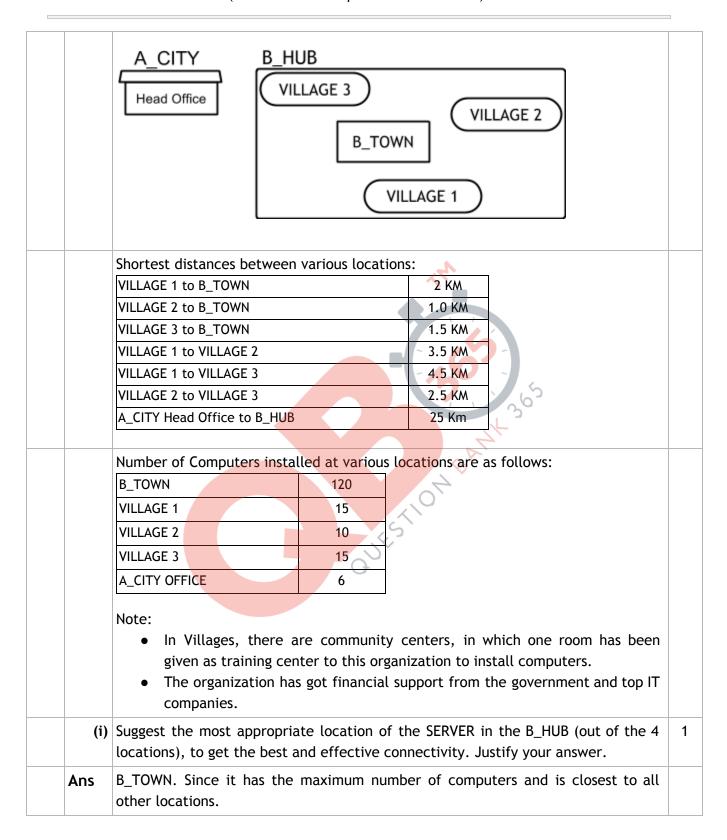

CBSE AISSCE 2005320516 Wasking Schemoft W Computer Science

	($\frac{1}{2}$ Mark for writing correct location name) ($\frac{1}{2}$ Mark for writing any one correct justification)	
(ii)	Suggest the best wired medium and draw the cable layout (location to location) to efficiently connect various locations within the B_HUB.	
Ans	Best Wired Medium : Optical Fibre	
	B_HUB VILLAGE 3 B_TOWN VILLAGE 2 VILLAGE 1 (1/2 Mark for writing the correct best wired medium name) (1/2 Mark for drawing the correct cable layout)	
(iii)	Which hardware device will you suggest to connect all the computers within each location of B_HUB?	
Ans	Switch OR Hub (1 Mark for writing any one of the above answers)	_
(iv)	Which service/protocol will be most helpful to conduct live interactions of Experts from Head Office and people at all locations of B_HUB?	
Ans	Videoconferencing OR VolP OR any other correct service/protocol (1 Mark for writing any one of the above answers)	_